


CONTROL POWER PUSHBUTTON STATIONS

AVAILABLE IN OVER 25 DIFFERENT SWITCH AND CONTACT COMBINATIONS

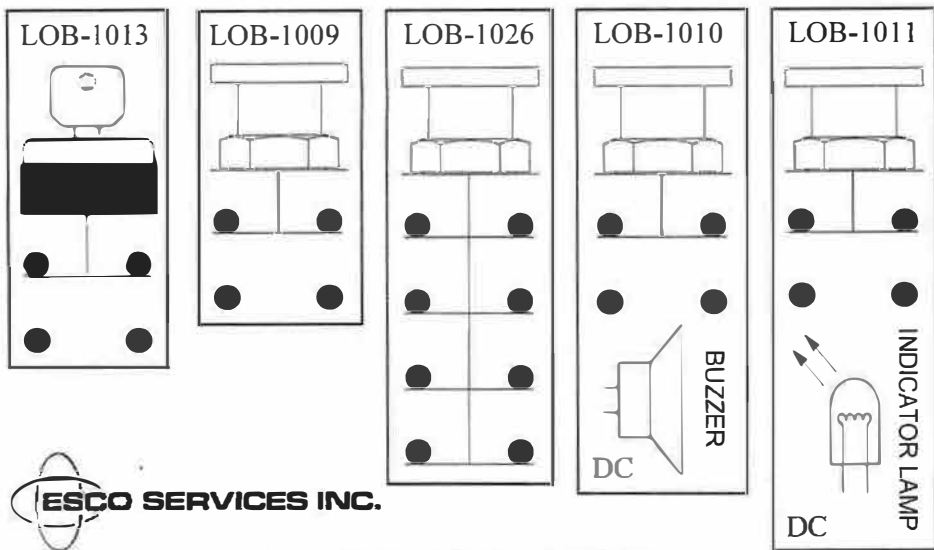

CONTACT OPTIONS	ACTUATOR TYPES	MAINTAINED PUSH TO STOP PULL TO RESET	KEY RESETABLE PUSH TO STOP KEY TO RESET
1-N.O./1-N.C.		LOB-1009	LOB-1013
1-N.O./1-N.C. With 3-18VDC Alarm *		LOB-1010	LOB-1027
1-N.O./1-N.C. With 110VAC Alarm *		LOB-1012	LOB-1028
1-N.O./1-N.C. With 24VDC Red Indicator Lamp *		LOB-1011	LOB-1029
1-N.O./1-N.C. With 110VAC Red Indicator Lamp *		LOB-1014	LOB-1030
2-N.C.		LOB-1015	LOB-1031
2-N.O./2-N.C.		LOB-1016	LOB-1032
2-N.O./2-N.C. With 110VAC Alarm *		LOB-1018	LOB-1034
2-N.O./2-N.C. With 24VDC Red Indicator Lamp *		LOB-1019	LOB-1035
2-N.O./2-N.C. With 110VAC Red Indicator Lamp *		LOB-1020	LOB-1036
1-N.O./3-N.C.		LOB-1021	NOT AVAILABLE
1-N.O./3-N.C. With 3-18VDC Alarm *		LOB-1022	NOT AVAILABLE
1-N.O./3-N.C. With 110VAC Alarm *		LOB-1023	NOT AVAILABLE
1-N.O./3-N.C. With 24VDC Red Indicator Lamp *		LOB-1024	NOT AVAILABLE
1-N.O./3-N.C. With 110VAC Red Indicator Lamp *		LOB-1025	NOT AVAILABLE
4-N.C.		LOB-1026	NOT AVAILABLE

Alarm or Indicator lamps may require internal wiring of one N.O. contact

Mod or Exceeds NEMA Rating Designations	Maintained Push to Stop / Pull to Reset A600, A300 and B300 for AC and P600 for DC								Maintained Push to Stop / Key to Reset A600 and Q600							
Description	Volts AC 50 or 60 Hz				Volts DC				A600 (AC) Volts				Q600 (DC) Volts			
	120	240	480	600	24/28	125	250		120	240	480	600	125	250	440	600
Make and Emergency Interrupting Capacity (Amp)	60	30	15	12	5.7	1.1	0.55		60	10	15	12	0.55	0.27	0.1	0.1
Normal Load Break (Amp)	6	3	1.5	1.2	5.7	1.1	0.55		6	3	1.5	1.2	0.55	0.27	0.1	0.1
Thermal Current (Amp)	10	10	10	10	5.0	5.0	3.0		10	10	10	10	2.5	2.5	2.5	2.5
Volts-ampere																
Make an Emergency Interrupting Capacity	7200	7200	7200	7200	7200	7200	7200									
Normal Load Break	720	720	720	720	138	138	138									

Contact Ratings




CONTROL POWER PUSHBUTTON STATIONS



MODEL #LOB-1009
MAINTAINED SWITCH
W/ 1 NO - 1 NC
CONTACT BLOCK

MODEL #LOB-1010
MAINTAINED SWITCH
W/ DC ALARM &
1 NO - 1 NC
CONTACT BLOCK

MODEL #LOB-1013
KEYLOCK SWITCH
W/ 1 NO - 1 NC
CONTACT BLOCK



ESCO's Control Power Pushbutton Stations can be used as an option for ESCO's other Power/Lock-out products or as a component for on site constructed Control Power systems.

- ◆ Available in over 25 variations.
- ◆ Clearly labeled bright Red and Safety Yellow polyester label aids in visibility.
- ◆ Large Red Mushroom style palm pushbutton switch actuator (Maintained or Key release).
- ◆ Heavy Duty Control Power Switch is either a maintained PUSH TO STOP / PULL TO RESET or PUSH TO STOP / KEY TO RESET.
- ◆ Combinations of normally open and normally closed 10 amp contacts.
- ◆ Light gray NEMA 4X enclosures measure: 5.12"H x 3.7"W x 2.24"D or 5.12"H x 3.7"W x 3.18"D
- ◆ Provisions for ten conduit knockout openings.
- ◆ Alarm and Lamp models can be internally wired to provide indication that the Control Power Switch has been pushed, saving the need for a service person to reset the system.
- ◆ Alarm model incorporates a 80 dB low voltage DC audio alarm which can be attached to a leak detection systems remote output contacts. Installing the alarm enables the operator to be forewarned of a potential emergency while at their work station.



Georgia

170 Chastain Meadows CT NW
Kennesaw, GA 30144-3723

Phone
(866) 335-1542

Michigan


14335 Industrial Center Drive
Shelby Township, MI 48315

Phone
(800) 521-1808


Florida

4025 Tampa Rd STE 1110
Oldsmar, FL 34677-3213

Phone
(800) 237-9710

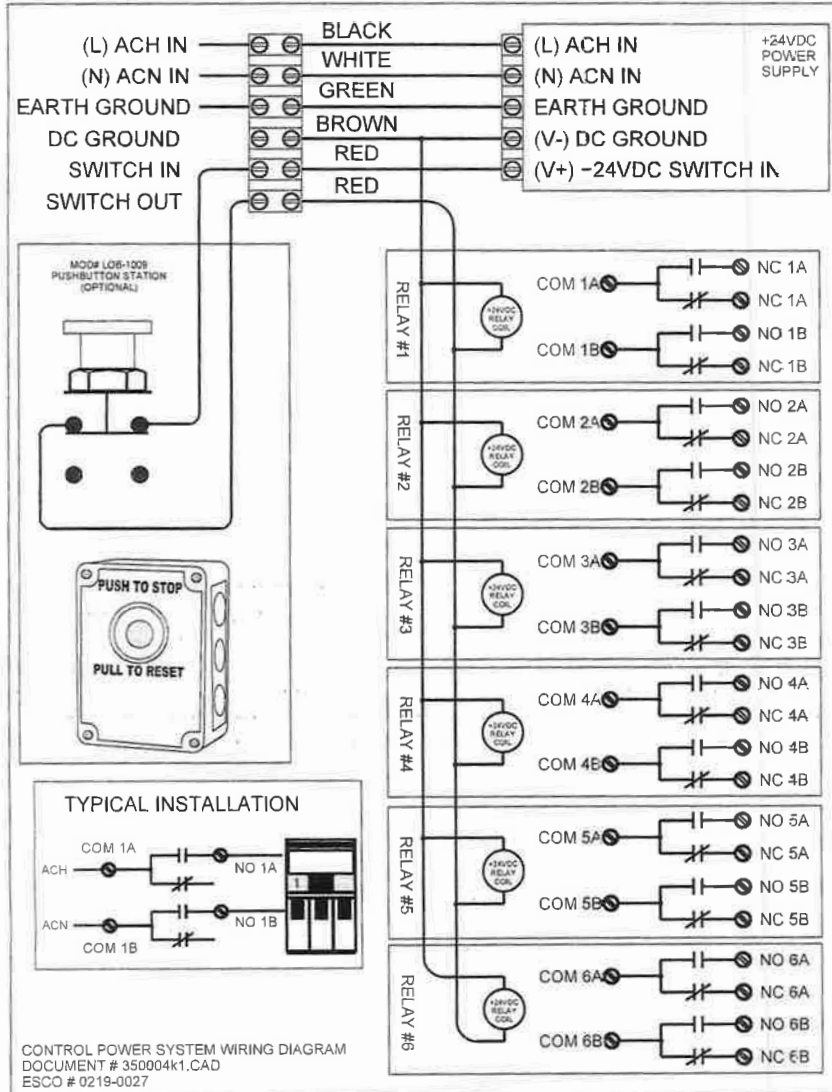

Sample Wiring Diagram 1

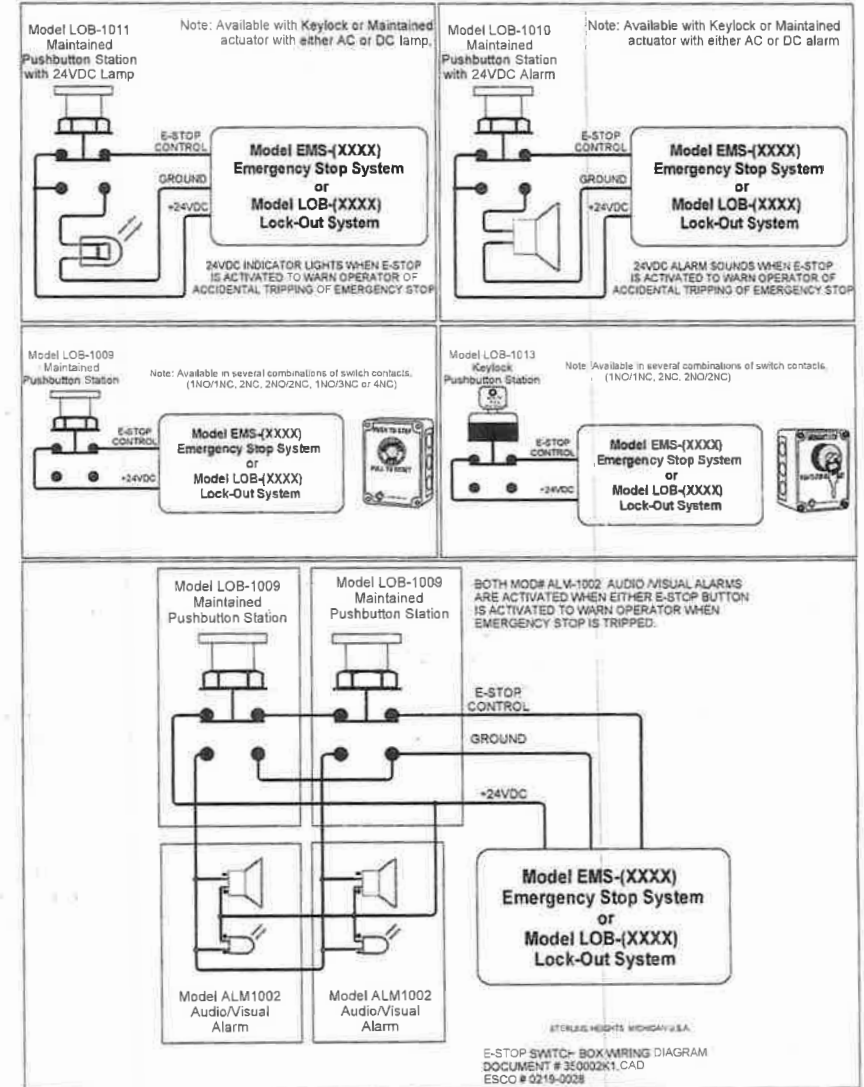

Sample Wiring Diagram 2